


E2X

E2X DOUBLE SEAL INDUSTRIAL CABLE GLAND


FOR LEAD SHEATHED BRAIDED CABLES

- Effectively earths / grounds lead sheathed cables
- Metal-to-metal armour clamping
- Direct & remote installation
- Permanently crimped, low impedance earth termination
- Secure against self-loosening
- Displacement type inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Deluge protection option
- -60°C to +130°C
- Superior EMC performance



TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
ELECTRICAL CLASSIFICATIONS*	Category B (Category A when used with braid, tape or pliable wire armour cables)
INGRESS PROTECTION RATING**	IP66 as standard (IP67, IP68*** available upon request)
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Aluminium
CABLE TYPE	Lead Sheathed & Wire Braid Armour, Lead Sheathed & Steel Tape Armour (LC/STA), Lead Sheathed & Pliable Wire Armour (LC/PWA), Lead Sheathed & Aluminium Strip Armour (LC/ASA)
SEAL MATERIAL	CMP Thermoset Rubber
SEALING TECHNIQUE	CMP Inner Displacement Seal & Unique CMP 'LRS'™ Outer Load Retention Seal
SEALING AREA(S)	Cable Inner Lead Sheath & Outer Sheath
ARMOUR CLAMPING	Detachable Armour Cone & AnyWay Universal Clamping Ring

GLOBAL PRODUCT CERTIFICATION	
GOST R CERTIFICATE	04ИДЮ101.GB.C02492
MARINE APPROVALS	LRS: 01/00171, ABS: 16-LD1472056-PDA

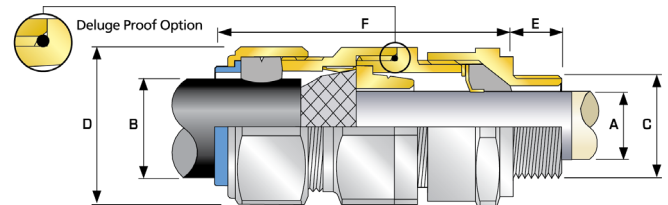

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request

† Grooved Cone (X) is predominantly used for Wire Braid (e.g. GSWB, TCWB), Steel Tape Armour (STA, DSTA) and Aluminium Strip Armour (ASA) but is also suitable for Single Wire Armour (SWA), Aluminium Wire Armour (AWA) and Pliable Wire Armour (PWA) if the range is outside that of the Stepped Cone (W). Grooved Cone (X) dimensions shown in the Cable Gland Selection Table below are for a double wire strand of braided armour cables. Tapes can also be doubled over. For cables that have only a single layer of armour such as SWA the clamping range should be used as shown in the table below. **If Tape Armour is to be used please contact CMP for advice.**

COMBINED ORDERING REFERENCE (*BRASS METRIC)			AVAILABLE ENTRY THREADS 'C'					CABLE LEAD SHEATH DIAMETER 'A'		OVERALL CABLE DIAMETER 'B'		ARMOUR RANGE † GROOVED CONE (X)		ACROSS FLATS 'D'		ACROSS CORNERS 'D'		PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
			STANDARD			OPTION														
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH (METRIC) 'E'	NPT	THREAD LENGTH (NPT) 'E'	NPT	MIN	MAX	MIN	MAX	MIN	MAX	MAX	MAX	MAX	MAX			
20S16	E2X	1RA	M20	10.0	½"	19.9	¾"	3.1	7.8	6.1	13.1	0.3	1.0	24.0	26.4	72.5	PVC04	0.160		
20S	E2X	1RA	M20	10.0	½"	19.9	¾"	6.1	11.0	9.5	15.9	0.3	1.0	24.0	26.4	70.0	PVC04	0.150		
20	E2X	1RA	M20	10.0	½"	19.9	¾"	6.5	13.4	12.5	20.9	0.4	1.0	30.5	33.6	73.0	PVC06	0.210		
25S	E2X	1RA	M25	10.0	¾"	20.2	1"	11.1	19.3	14.0	22.0	0.4	1.2	37.5	41.3	89.0	PVC09	0.330		
25	E2X	1RA	M25	10.0	¾"	20.2	1"	11.1	19.3	18.2	26.2	0.4	1.2	37.5	41.3	89.0	PVC09	0.330		
32	E2X	1RA	M32	10.0	1"	25.0	1 ¼"	17.0	25.5	23.7	33.9	0.4	1.2	46.0	50.6	86.0	PVC11	0.430		
40	E2X	1RA	M40	15.0	1 ¼"	25.6	1 ½"	22.0	31.2	27.9	40.4	0.4	1.6	55.0	60.5	90.0	PVC15	0.620		
50S	E2X	1RA	M50	15.0	1 ½"	26.1	2"	29.5	37.2	35.2	46.7	0.4	1.6	60.0	66.0	91.0	PVC18	0.750		
50	E2X	1RA	M50	15.0	2"	26.9	2 ½"	35.6	42.6	40.4	53.0	0.6	1.6	70.1	77.1	95.0	PVC21	0.960		
63S	E2X	1RA	M63	15.0	2"	26.9	2 ½"	40.1	48.5	45.6	59.4	0.6	1.6	75.0	82.5	102.0	PVC23	1.350		
63	E2X	1RA	M63	15.0	2 ½"	39.9	3"	47.2	54.2	54.6	65.8	0.6	1.6	80.0	88.0	104.0	PVC25	1.350		
75S	E2X	1RA	M75	15.0	2 ½"	39.9	3"	52.8	60.2	59.0	72.0	0.6	1.6	90.0	99.0	115.0	PVC28	2.120		
75	E2X	1RA	M75	15.0	3"	41.5	3 ½"	59.1	65.2	66.7	78.4	0.6	1.6	100.0	110.0	117.0	PVC30	2.430		
90	E2X	1RA	M90	24.0	3 ½"	42.8	4"	66.6	77.1	76.2	90.3	0.8	1.6	114.3	125.4	147.0	PVC32	4.230		
100	E2X	1RA	M100	24.0	4"	44.0	5"	76.0	88.1	86.1	101.4	0.8	1.6	123.0	135.3	140.0	LSF33	4.470		
115	E2X	1RA	M115	24.0	4"	44.0	5"	86.0	94.1	101.5	110.2	0.8	1.6	133.4	146.7	162.0	LSF34	6.210		
130	E2X	1RA	M130	24.0	5"	46.8	6"	97.0	110.1	110.2	123.2	0.8	1.6	152.4	167.6	174.0	LSF35	8.360		

* Note: For material options please add the following suffix to change the ordering reference; Brass (no suffix required), Nickel Plated Brass "S", Copper Free Aluminium "1"
For NPT options add the following digits to the material suffix; ½" = 31; ¾" = 32; 1" = 33; 1 ¼" = 34; 1 ½" = 35; 2" = 36; 2 ½" = 37; 3" = 38; 3 ½" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32E2X1RA534 = Nickel Plated Brass 1 ¼" NPT, 50SE2X1RA035 = Brass 1 ½" NPT, 20E2X1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary.

www.cmp-products.com

TDS536 REV8 03/22